


CRAWLER DOZERS

93–152 kW (125–205 hp)



JOHN DEERE



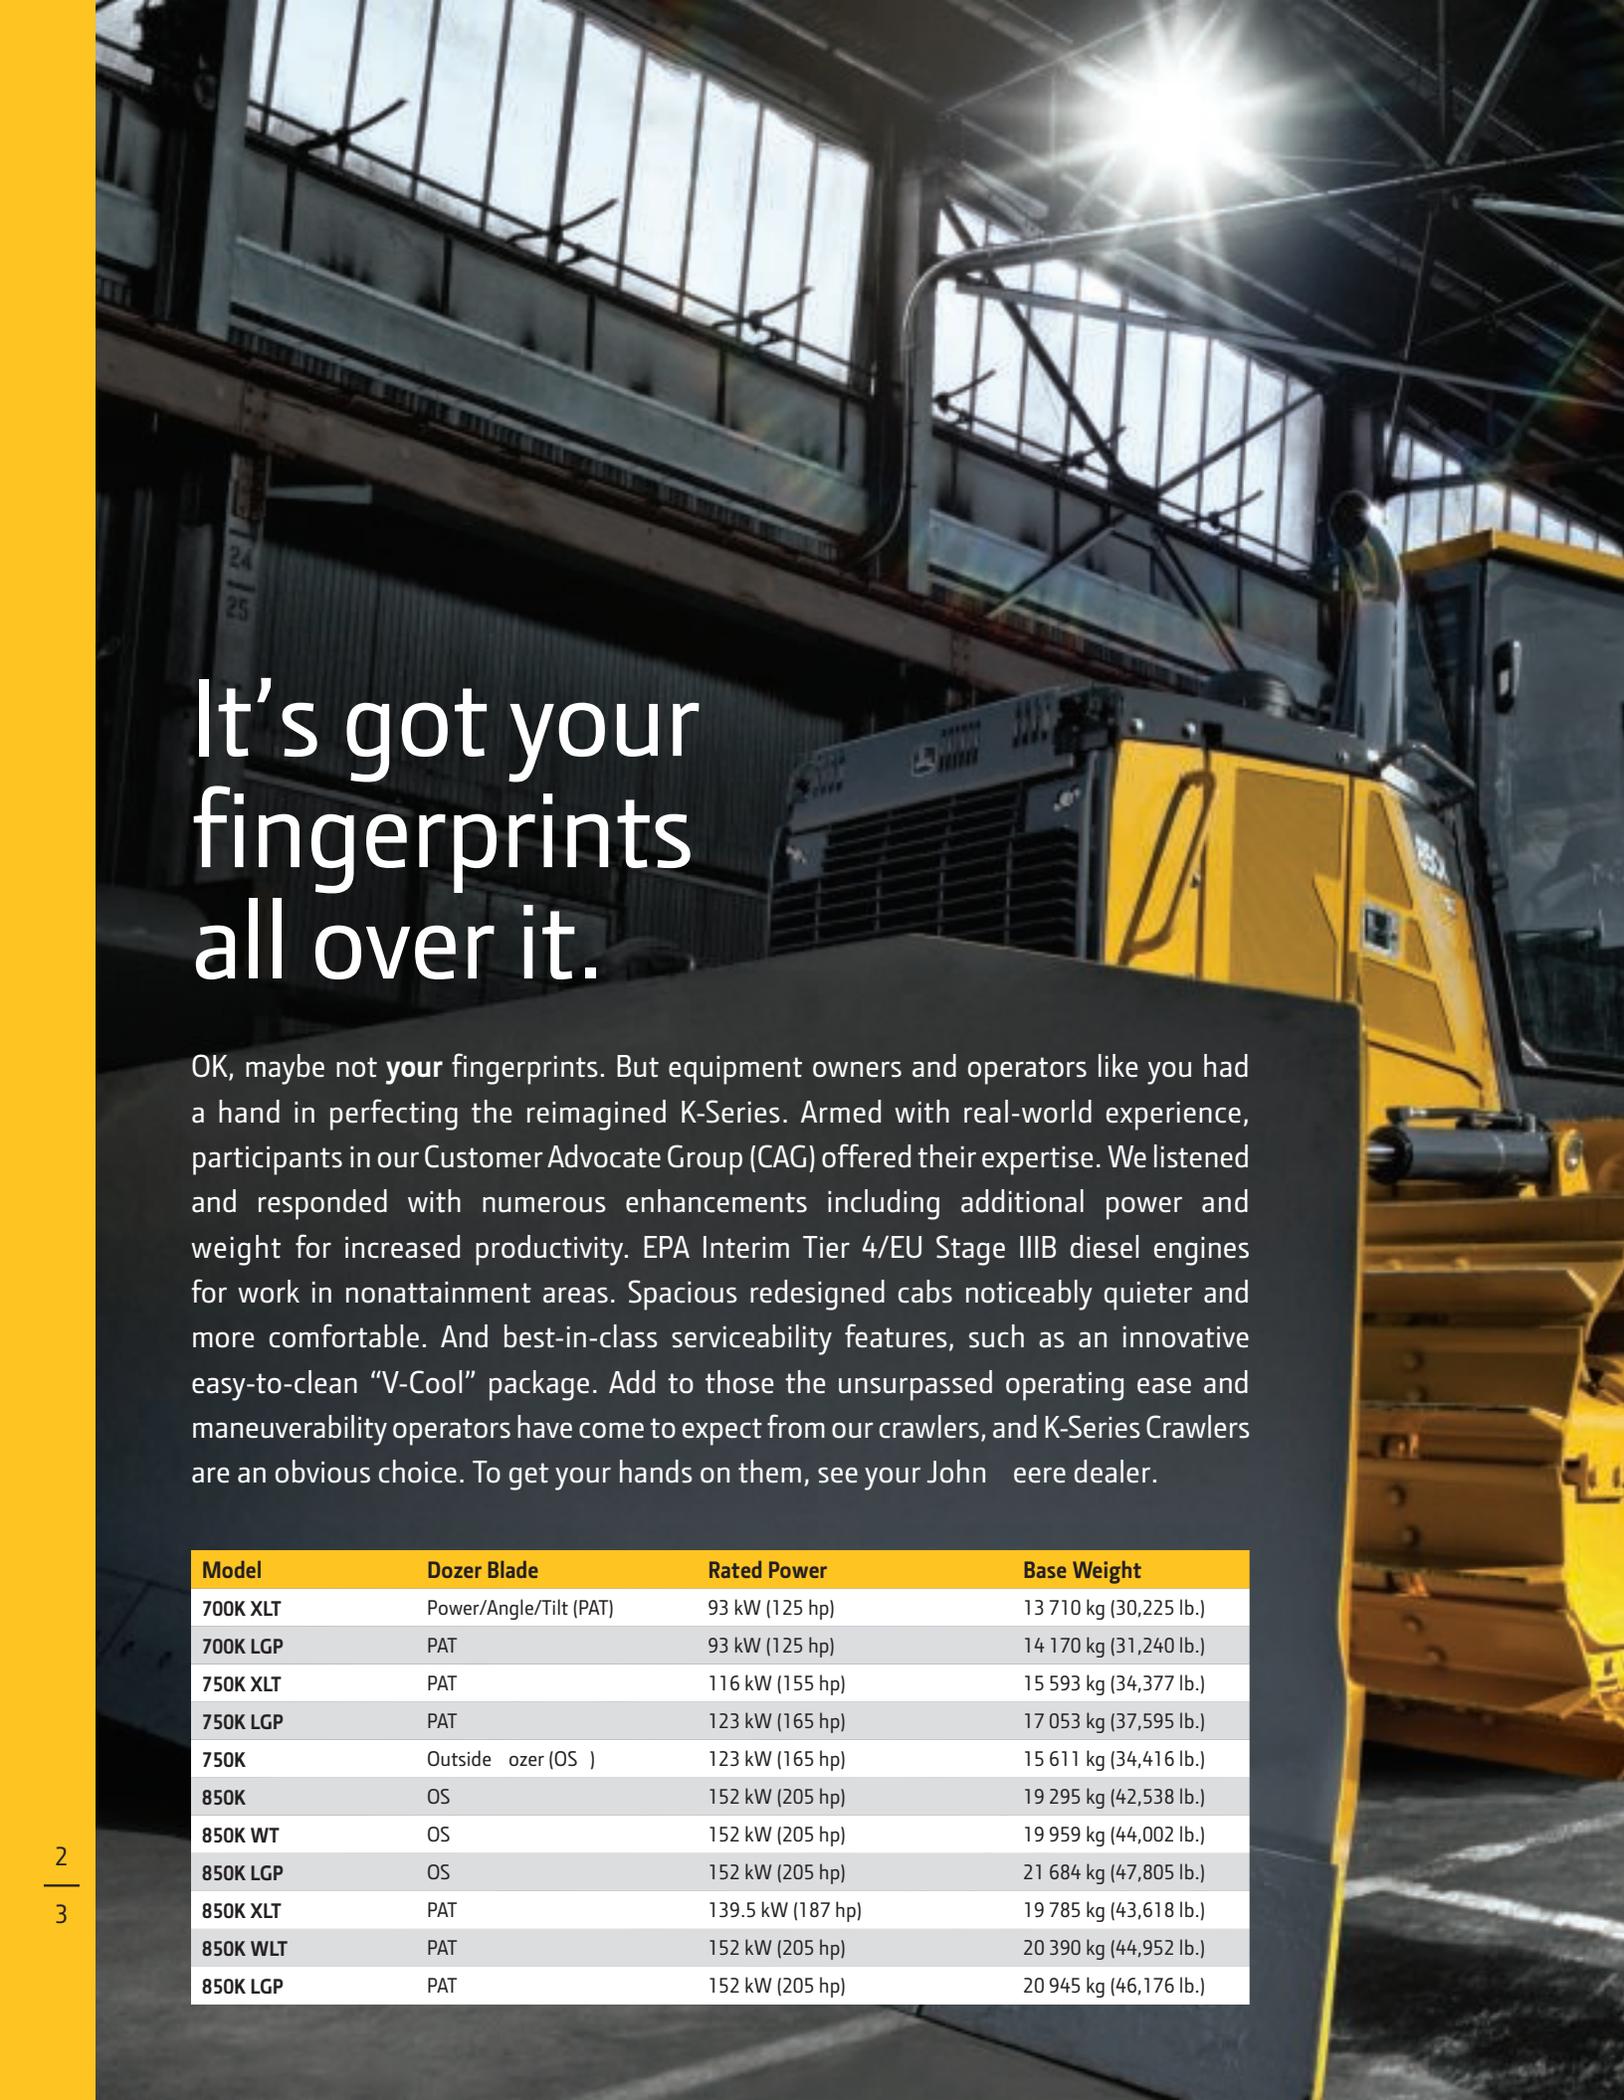

It's got your fingerprints all over it.

OK, maybe not **your** fingerprints. But equipment owners and operators like you had a hand in perfecting the reimagined K-Series. Armed with real-world experience, participants in our Customer Advocate Group (CAG) offered their expertise. We listened and responded with numerous enhancements including additional power and weight for increased productivity. EPA Interim Tier 4/EU Stage IIIB diesel engines for work in nonattainment areas. Spacious redesigned cabs noticeably quieter and more comfortable. And best-in-class serviceability features, such as an innovative easy-to-clean “V-Cool” package. Add to those the unsurpassed operating ease and maneuverability operators have come to expect from our crawlers, and K-Series Crawlers are an obvious choice. To get your hands on them, see your John Deere dealer.

Model	Dozer Blade	Rated Power	Base Weight
700K XLT	Power/Angle/Tilt (PAT)	93 kW (125 hp)	13 710 kg (30,225 lb.)
700K LGP	PAT	93 kW (125 hp)	14 170 kg (31,240 lb.)
750K XLT	PAT	116 kW (155 hp)	15 593 kg (34,377 lb.)
750K LGP	PAT	123 kW (165 hp)	17 053 kg (37,595 lb.)
750K	Outside Dozer (OS)	123 kW (165 hp)	15 611 kg (34,416 lb.)
850K	OS	152 kW (205 hp)	19 295 kg (42,538 lb.)
850K WT	OS	152 kW (205 hp)	19 959 kg (44,002 lb.)
850K LGP	OS	152 kW (205 hp)	21 684 kg (47,805 lb.)
850K XLT	PAT	139.5 kW (187 hp)	19 785 kg (43,618 lb.)
850K WLT	PAT	152 kW (205 hp)	20 390 kg (44,952 lb.)
850K LGP	PAT	152 kW (205 hp)	20 945 kg (46,176 lb.)





Go beyond the limits of other crawlers.

Packed full of production-boosting advantages, our dozers do more without a lot of extra effort. State-of-the-art electronic controls put an operator in complete command of an arsenal of production-boosting hydrostatic advantages, including power turns, counterrotation, and infinitely variable travel speeds. What's more, Total Machine Control allows customized decelerator mode and response, forward/reverse ground-speed, steering modulation, and forward/reverse speed ratios. Nothing runs like a Deere.



Infinitely variable range to 11 km/h (6.8 mph) gives total flexibility to match ground speed to the load. Travel can also be varied to fit specific applications, terrain conditions, or operating preferences — or limited to maximize undercarriage life.

Equipped with optional Integrated Grade Control (IGC), adding your preferred system is as simple as plugging in the components, calibrating, and going to work.

Independent track control speeds up or slows down each side — for smooth, full-power turns. An automatic 10-percent power boost helps carry big blade loads through turns.


Low-effort controls command the blade and full-featured hydrostatic drivetrain, ensuring predictable response at all times in all conditions.

1. These crawlers steer the same and maintain their preset speed whether working on level ground or a 2-to-1 slope. So there's never a need to cross-steer or ride a brake.

2. Counterrotation is another productivity-boosting feature. It enables an operator to overcome heavy corner loads and quickly reposition the blade on the go. Provides space-saving spot turns, too.

3. Simply set maximum desired ground speed and the power management system automatically maintains peak engine rpm and power efficiency without stalling or shifting.



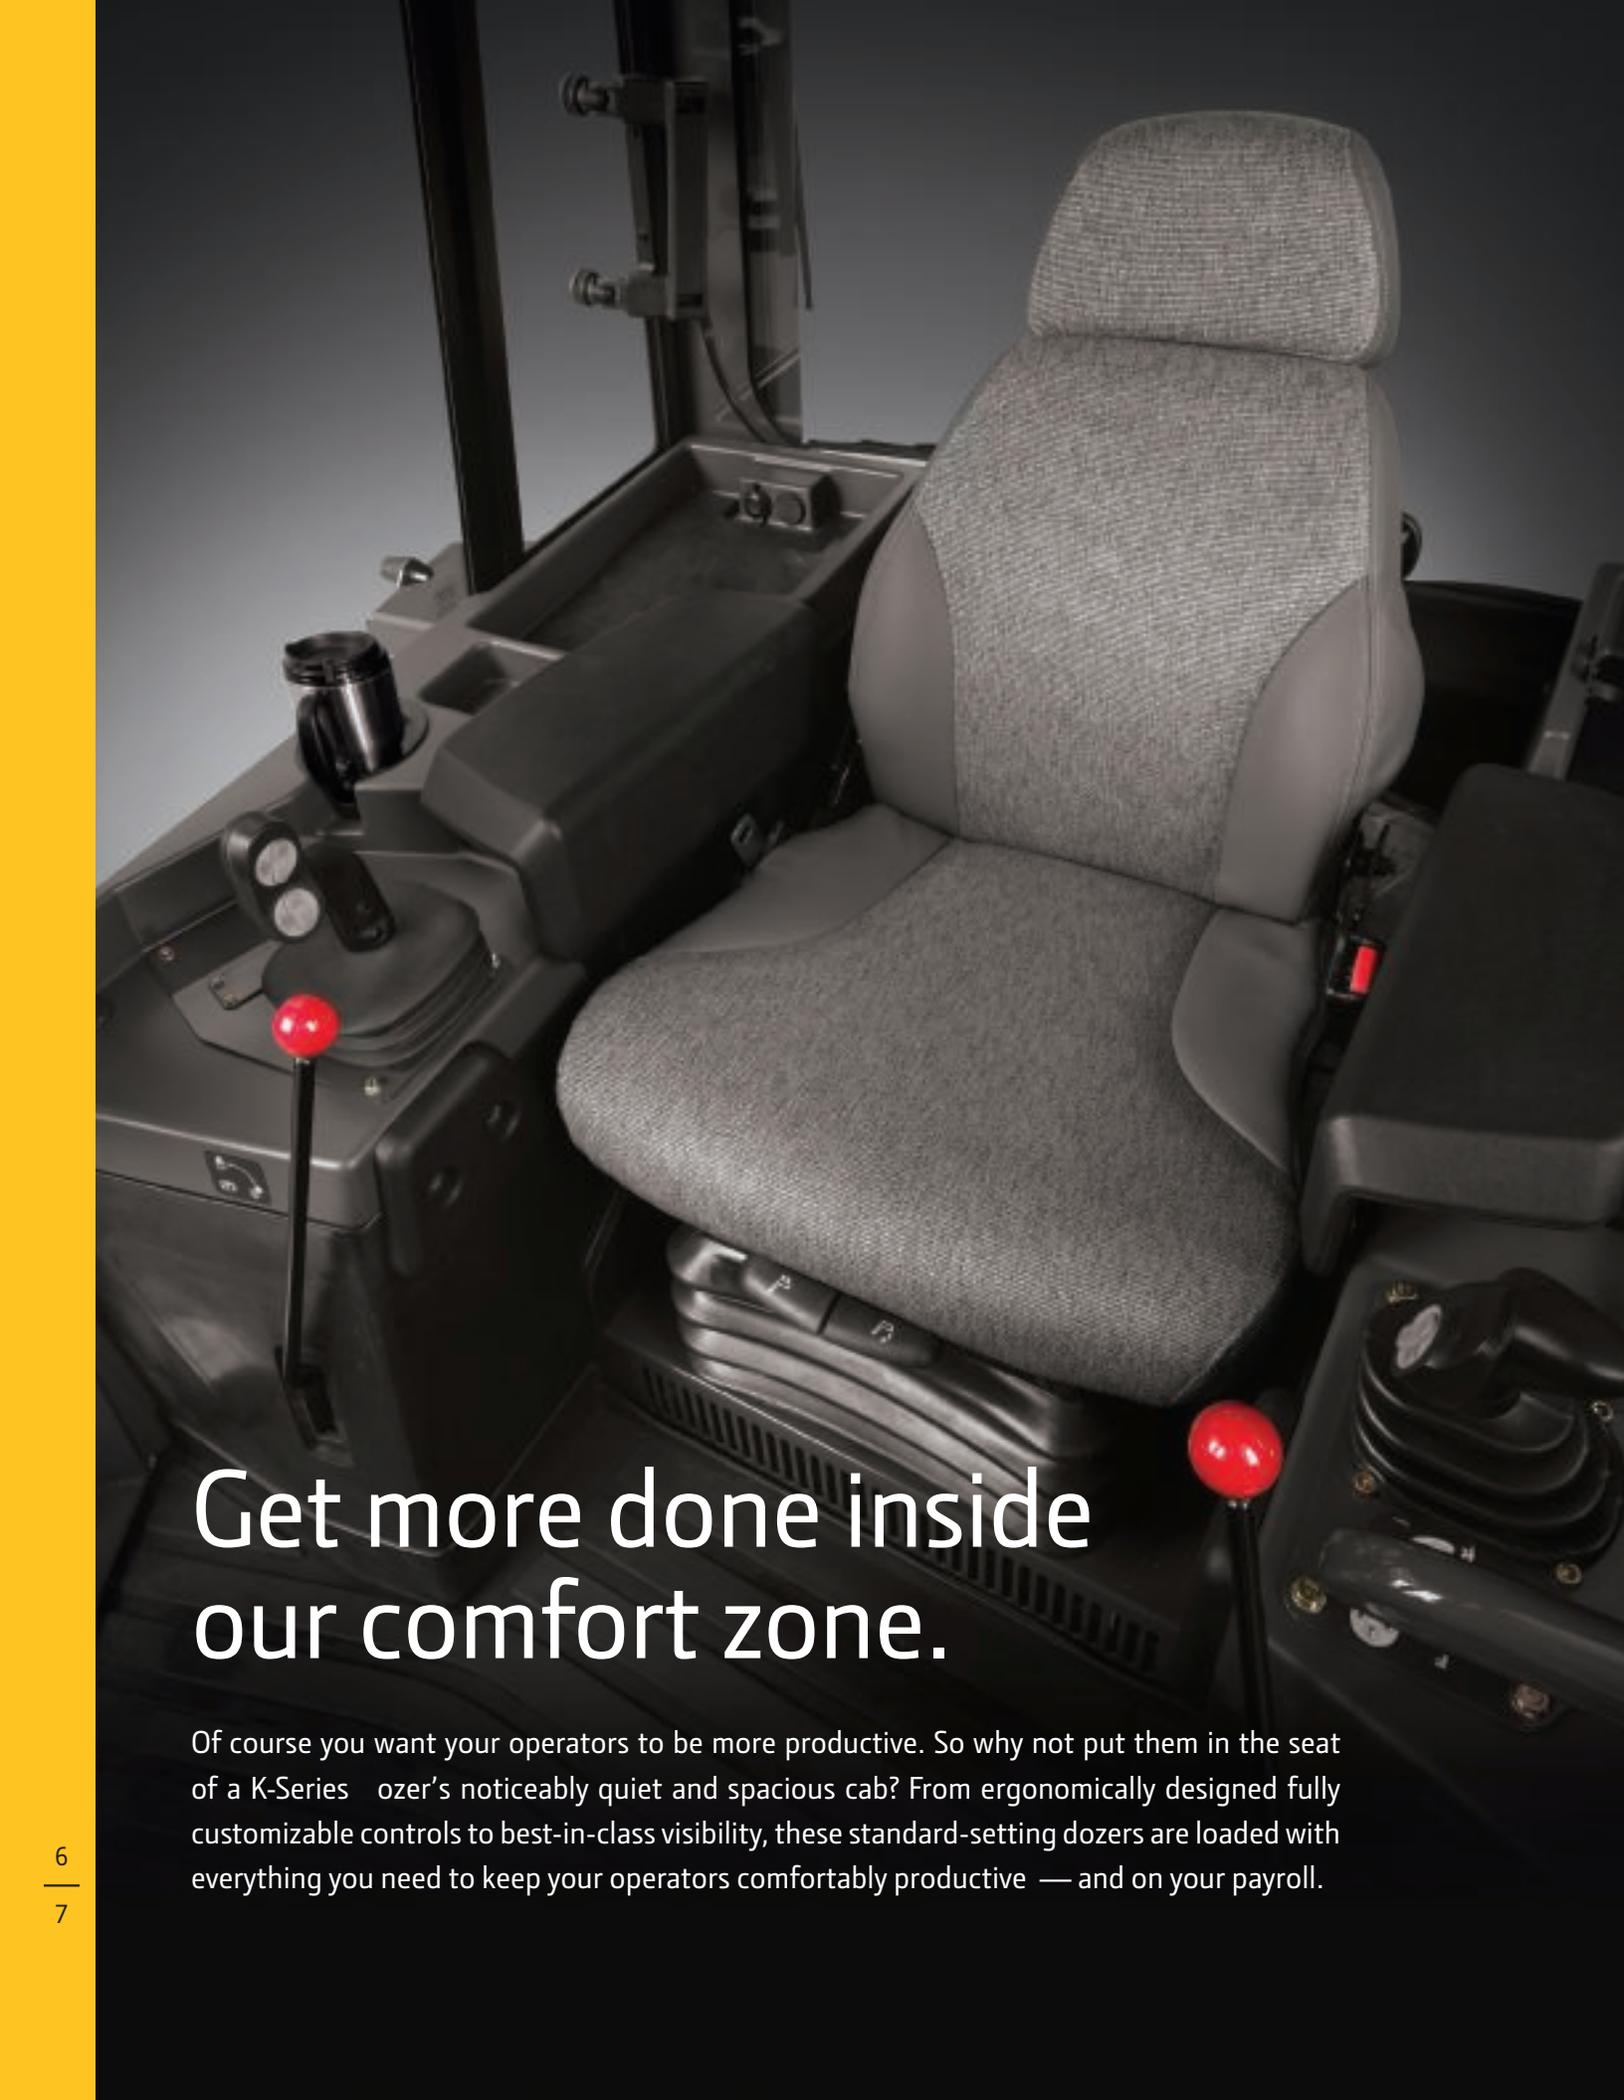

Get more done inside our comfort zone.

Of course you want your operators to be more productive. So why not put them in the seat of a K-Series dozer's noticeably quiet and spacious cab? From ergonomically designed fully customizable controls to best-in-class visibility, these standard-setting dozers are loaded with everything you need to keep your operators comfortably productive — and on your payroll.

1. Sealed-switch module gives fingertip control of keyless start, and enables exclusive features such as turbocharger cool-down and auto shutdown. Touchpad security system requires a numeric pass code (when enabled) to help prevent unauthorized machine operation.

2. Beyond cup and cooler holders, there are plenty of places to store stuff. If you're running a grade-control system, the lockable in-dash compartment is ideal for end-of-day storage (or permanent placement) of the monitor.

3. Overhead radio and storage console includes a 12-volt electrical outlet for powering a cell phone or an iPod®.



Oil-filled cab mounts and extensive insulation effectively isolate operators from vibration and noise. At just 76 dBA, the cab is noticeably quiet.

Standard high-back air-suspension seat and optional deluxe heated and leather-bolstered lower cushion adjust multiple ways for daylong comfort and support. Arm- and footrests also adjust.

Numerous directional vents keep the glass clear and interior comfortable. Pressurized cab helps keep dust out. Air conditioning is standard. For ROPS-only models, an optional under-seat heater helps warm the operator.

Fully modulated hydrostatic drive-train ensures smooth moves, virtually eliminating jerky or abrupt movements.

Ergonomically correct joystick provides intuitive, low-effort control of steering, direction, and ground speed. It's detented so it doesn't require an operator's constant touch or attention, and employs a thumb-actuated travel-speed control switch.

Use the decelerator to slow both ground speed and engine rpm. Or ground speed only to help maintain traction without affecting engine power and hydraulic response. Fully depressing the pedal applies the brakes.


Exclusive Total Machine Control (TMC) monitor lets an operator select decelerator mode and response, forward/reverse ground-speed ranges, steering modulation, FNR shift rate, and forward/reverse speed ratios.

Nothing runs like a Deere, because nothing is built like it.

Designed and built with state-of-the-art tools and techniques by a quality-conscious workforce at our world-class facility in Dubuque, Iowa, the K-Series come loaded with uptime-boosting features. Enhancements such as our unique V-Cool system and EPA IT4/EU Stage IIIB diesel engine — plus traditional John Deere features such as one-piece unitized mainframes, DuraTrax™ undercarriage, wet-sleeve engine liners, and isolated planetary final drives give these dozers the durability you need. When you know how it's built, you'll run these Deere.

1. Our EPA IT4/EU Stage IIIB technology is simple, fuel efficient, fully integrated, and fully supported. It employs field-proven cooled exhaust gas recirculation (EGR) for reducing NO_x, and a diesel particulate filter and diesel oxidation catalyst to reduce particulate matter. Periodic active and passive regeneration automatically cleans the filter without impacting machine productivity.
2. Sealed-switch module keeps out moisture and debris, and virtually never wears out.
3. V-Cool design isolates coolers from dust and engine heat for increased efficiency and durability. Positioned behind the heavy-duty grille and fan, coolers are also less vulnerable.

Only our K-Series are available with John Deere WorkSight™. This easy-to-use comprehensive suite of technology increases uptime and productivity while lowering operating costs. JDLink™ machine monitoring provides real-time machine utilization and health data, plus location information. Fleet Care proactively suggests maintenance to correct problems early before they create costly downtime. Service ADVISOR™ Remote enables your dealer to read diagnostic codes, record performance data, and even update software without a trip to the jobsite. And Integrated Grade Control (IGC) makes it easy to add your preferred grade-control system.

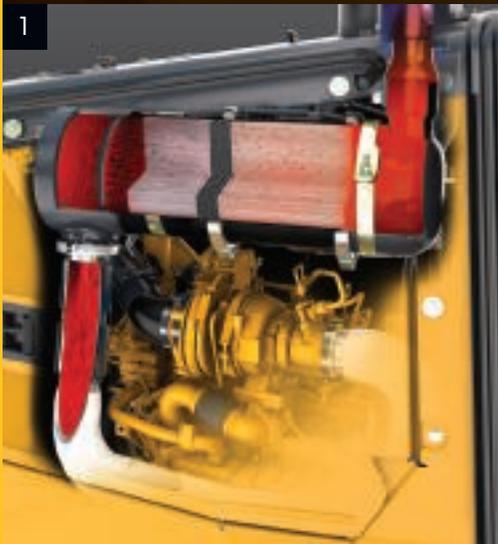



Flush-fit bottom guards and tight-fitting side shields help keep trash out. Hood and side-shield perforations function as a “first filter,” further preventing entry of most debris. Anything that gets past the five-mm holes also passes through the cooler cores.

Available extended-life undercarriage delivers up to twice the bushing life, for extra durability in extremely abrasive conditions. If you want to further reduce maintenance and operating costs, choose the SC-2™ extended-life option.

Individually replaceable wet-sleeve engine-cylinder liners provide uniform engine cooling and long-term durability.

Reversing fan (standard on 750K and 850K) automatically back-blows the cooler cores at preset intervals. When conditions demand more frequent cleaning, simply press a button to actuate the reversing cycle.

Variable-speed on-demand fan automatically speeds up or slows down, operating only as needed to keep things cool. Helps conserve power and fuel, while reducing noise.

One-piece welded mainframe resists torsional stress, absorbs shock loads, and delivers maximum strength while allowing easy service access to major components. Heavy-duty double-reduction planetary final drives are mounted independent of the track frames, where they’re effectively protected from shock loads.

Cab-forward design provides a commanding view behind, below, and beyond the blade. Side and rear visibility is also unobstructed.

Generous hydraulic flow and precise metering ensure powerful and quick blade response, while providing the natural “feel” that enhances any operator’s grading ability.

Four position settings on PAT dozers and infinite screw-type adjustment on outside-mount dozers allow you to easily fine-tune blade pitch to maximize productivity.



Precise grades, strong blades.



John Deere dozers enjoy solid reputations as superior grading machines. And for plenty of reasons. Unlike others that utilize the same mainframe with all dozers, our purpose-built design optimizes blade ratio and center of gravity for superior balance. So whether you opt for a power/angle/tilt (PAT) or an outside-mount straight or semi-U blade, you'll profit from uncompromised performance.

Durability is also second-to-none. Advantages such as noticeably larger push beams, closed-cell blades, box-section C-frames, and steel-cable-supported Cordura®-covered hydraulic hoses provide long-term stamina and strength.



1. PAT blade's heavy-duty ball-and-socket C-frame joint resists material build-up for long-term grading precision. Blade hoses are steel-cable supported and Cordura covered for extra protection.
2. With heavy-duty high-profile push beams and a three-position pitch-adjustable semi-U blade, the outside-mount dozer delivers exceptional durability and high-production performance.

3. Heavy-duty cross-members provide solid lateral support and are shaped to allow a clear view of the bottom of the blade. What's more, their raised position allows generous clearance at the end of the push.
4. Greaseless shim-adjustable clamshell bearings in front and rear joints of the push beams ensure a tight connection for low-maintenance "like-new" grading performance.

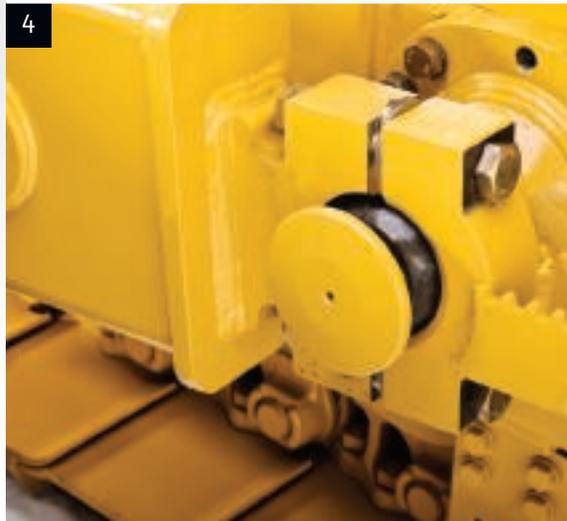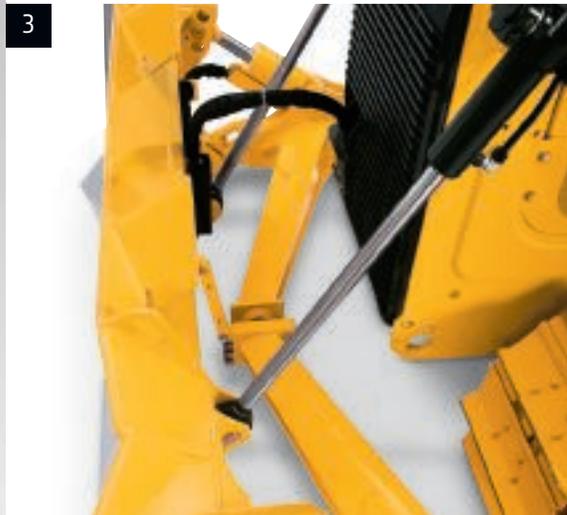

Our “open-architecture” design lets you employ the electronic grade-control system that’s right for you, whether it’s a Trimble®, Topcon, or other. Wiring harnesses, sensor mounts, control valves, and monitor bracket are factory installed, so adding a system is quick and noninvasive.



Configured, not compromised.

Yours isn't just any business. Why settle for just any crawler? With a choice of five undercarriage configurations, inside-mount PAT or outside-mount straight or semi-U blades, and numerous other options, building a John Deere dozer your way is the way we do business. These highly versatile machines can also be equipped with special-duty and severe-application packages that help them thrive on a wide variety of jobsites. And tackle tasks that other crawlers can't. Ask your dealer for details.



1. Protection packages and waste-handler configurations equip these dozers to survive, even thrive, in tough environments.
2. With their hydrostatic drivetrains and impressive drawbar pull, our dozers work well with rear-mount attachments such as rippers and cable plows.
3. High-intensity halogen driving lights are standard. But if you want to extend your workday beyond daylight, opt for the 360-degree light package.



Model	Dozer Blade	Grouser Width
700K XLT	PAT	560 mm (22 in.)
700K LGP	PAT	760 mm (30 in.)
750K XLT	PAT	560 mm (22 in.)
750K LGP	PAT	865 mm (34 in.)
750K	OSD	560 mm (22 in.)
850K	OSD	610 mm (24 in.)
850K WT	OSD	760 mm (30 in.)
850K LGP	OSD	910 mm (36 in.)
850K XLT	PAT	610 mm (24 in.)
850K WLT	PAT	760 mm (30 in.)
850K LGP	PAT	910 mm (36 in.)

Choose the undercarriage and dozer options that are right for your work.

Designed with an open mind.

It takes only minutes to uncover the many ways our reimagined K-Series help minimize maintenance. Side shields swing open wide to reveal convenient same-side daily service points. An exclusive tilt-out fan box allows simplified access to cooler cores for quick cleanout. Other periodic service tasks such as fluid and filter changes are also refreshingly easy. Even gaining access to drivetrain components takes only minutes. As you can see, when it comes to keeping uptime up and daily operating costs down, we're pretty open-minded.



1. Available quick fluid-evacuation system helps speed servicing. Five-hundred-hour engine oil and 2,000-hour transmission and hydraulic fluid intervals decrease downtime and expense.






2. Exhaust filter operation and status are indicated with icons and on-screen displays. The diagnostic monitor also provides easy-to-understand messages that help speed troubleshooting.

3. Innovative V-Cool design provides convenient access to both sides of the coolers for easy cleanout. Hydraulically driven fan runs only as needed, reducing fuel consumption and debris flow through the cores.

4. Operator station tilts a full 70 degrees in only minutes, for wide-open drivetrain component access.

5. Fluid-sample and diagnostic test ports simplify preventative maintenance work and troubleshooting for increased uptime.

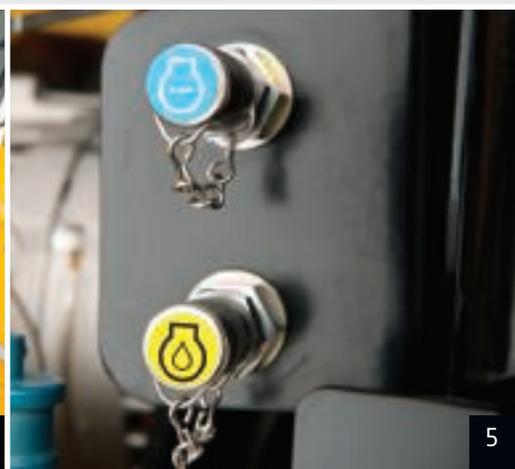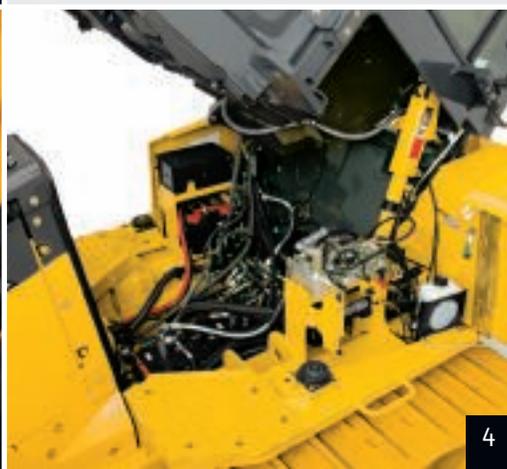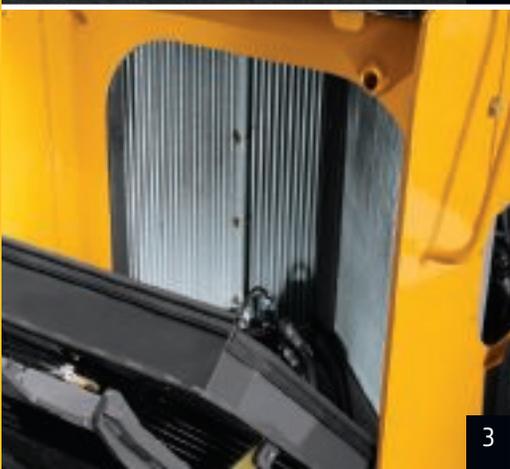

Hinged side shields swing open wide for convenient access to dipsticks; fill tubes; batteries; master electrical shutoff; and engine, transmission, and hydraulic filters.

Heavy-duty recessed belly guards allow easy access to the engine oil pan for fast service.

Advanced diagnostic monitor provides easy-to-understand messages to help speed troubleshooting.

Sealed hydraulic and hydrostatic reservoirs are separate, eliminating any possibility of cross-contamination.

Remote lube banks provide easy access to difficult-to-reach crossbar and C-frame pivots. Convenient color-coded lube chart ensures that nothing gets overlooked.

Vertical filters allow quick, no-spill changes. Engine, hydraulics, and transmission utilize a common oil, further simplifying service.

Diesel particulate filter is easily removed through the top of the engine compartment. Minimum service interval is 5,000 hours and can be done by your John Deere dealer.

Did you hear the one about the service technician who showed up with the right part — without first having seen the machine? It's possible with Service ADVISOR Remote. So are system software updates via JDLINK. See your dealer for details about this brave new world of remote diagnostics and repair.



Additional equipment

Key: ● Standard ▲ Optional or special

See your John Deere dealer for further information.

700K	750K	850K	Engine
●	●	●	Meets EPA Interim Tier 4/EU Stage IIIB emissions
●	●	●	Electronic control with automatic engine protection
●	●	●	Dual-element dry-tube air cleaner with tangential unloader valve
●	●	●	Exhaust filter, under hood, with vertical stack
●	●	●	Engine glow plug starting system
●	●	●	Programmable auto engine shutdown
●	●	●	Automatic turbo cool-down timer
●	●	●	Environmental service drains
●	●	●	Fuel filters with automatic electronic priming (remote mounted on 700K)
●	●	●	Wet-sleeve cylinder liners
▲	▲	▲	Engine block heater, 110 volts
▲	▲	▲	Engine coolant heater, fuel fired
▲	▲	▲	Chrome exhaust
▲	▲	▲	Rotary ejector engine air pre-cleaner
▲	▲	▲	Fluid-sample valves
▲	▲	▲	Severe-duty 400-mL (13.5 oz.) fuel filter and water separator with heating element
			Cooling
●	●	●	Tilt-out cooling fan, hydraulically driven, variable-speed suction type
▲	●	●	Automatic, programmable reversing-fan-drive fan
●	●	●	Engine coolant radiator (10 fins per in.)
●	●	●	Hydrostatic cooler (oil/air – 10.2 fins per in.)
●	●	●	Hydraulic cooler (oil/air – 10.2 fins per in.)
●	●	●	Enclosed safety fan guard (conforms to SAE J1308 and ISO3457)
●	●	●	Perforated engine and hood side shields
●	●	●	Heavy-duty tilt-out bar-type grille
●	●	●	2-side access to all coolers
●	●	●	Cooling package isolated from engine compartment
●	●	●	Heavy-duty, trash-resistant radiator and high-ambient cooling package
▲	▲	▲	Extreme-duty tilt-out grille
			Transmission
●	●	●	Remote diagnostic test ports
●	●	●	Automatic cold-weather transmission warmup system
●	●	●	Automatic transmission derating for exceeded system temperatures
●	●	●	Environmental service drains
●	●	●	2,000-hour vertical spin-on transmission filter
●	●	●	Sealed dedicated transmission reservoir and filtration system separate from hydraulic system
▲	▲	▲	Final-drive seal guards (for trash use)
			Hydraulic System
●	●	●	2-function hydraulics
●	▲	▲	3-function hydraulics
▲	▲	▲	3-function hydraulics with rear plumbing
▲	▲	▲	4-function hydraulics with rear plumbing
●	●	●	Hydraulic cooler
●	●	●	2,000-hour vertical spin-on hydraulic filter
●	●	●	Sealed dedicated hydraulic reservoir and filtration system separate from transmission system
▲	▲	▲	High-flow hydraulic pump for use with winch

700K	750K	850K	Hydraulic System (continued)
▲	▲	▲	Drive-through hydraulic pump for use with winch
▲	▲	▲	Integrated Grade Control (IGC)
			Mainframe, Access Panels
●	●	●	Tilt operator station service access
●	●	●	Front tow loop
●	●	●	Integral bottom protection
●	●	●	Hinged bottom access covers (bolt-on)
●	●	●	Vandal protection: Engine access door / Side tank access doors / Fuel tank / Instrument panel / Transmission reservoir / Hydraulic reservoir
●	●	●	Maintenance-free center cross-bar pivot
			Attachments
▲			Counterweight, front, 172 kg (380 lb.)
	▲		Counterweight, rear, 326 kg (720 lb.)
		▲	Counterweight, front, 397 kg (875 lb.)
		▲	Counterweight, rear, 449 kg (990 lb.)
		▲	Landfill package
▲	▲	▲	Retrieval hitch with pin
▲	▲	▲	Extended rigid drawbar with pin for pull-type implements
▲			Drawbar, extended for winch (with or without fairlead)
▲	▲	▲	Ripper, parallelogram with 5 shank pockets and 3 teeth
▲			Winch, John Deere 4000S, power in/free spool out OR power out
	▲	▲	Winch, hydrostatically driven*
	▲	▲	Winch, direct drive*
▲			4-roller fairlead for winch
▲			Root-rake blade attachment
▲	▲	▲	Operator-protection package
▲	▲	▲	Forestry-protection package
▲	▲	▲	Trimble®-ready interface package
▲	▲	▲	Topcon-ready interface package
▲	▲	▲	Leica-ready interface package
			Undercarriage
●	●	●	Full-length, smooth-surface track frame covers
●	●	●	Guides, front and rear, with wear strips
●	●	●	Segmented sprockets
●	●	●	Double-flange rollers
●			Maximum Life Undercarriage System
●	●	●	Oscillating undercarriage
▲	●	●	Heavy-duty sealed and lubricated undercarriage
	▲	▲	Extended life undercarriage SC-2™ bushings
▲	▲	▲	Full-length rock guards
		▲	Recessed sprockets
			XLT LGP 700K Shoes
●	▲		560-mm (22 in.) moderate service
	▲		610-mm (24 in.) moderate service
		●	760-mm (30 in.) moderate service
			STD XLT LGP 750K Shoes
●	●	▲	560-mm (22 in.) moderate service
▲	▲	▲	560-mm (22 in.) extreme service
▲	▲	▲	610-mm (24 in.) moderate service
▲	▲	▲	610-mm (24 in.) extreme service
		▲	710-mm (28 in.) moderate service
		●	865-mm (34 in.) moderate service with clipped corners

STD	WT	XLT	WLT	LGP	850K Shoes
▲	▲	▲	▲	▲	560-mm (22 in.) extreme service
●	▲	●	▲	▲	610-mm (24 in.) moderate service
▲	▲	▲	▲	▲	610-mm (24 in.) extreme service
	●		●	▲	760-mm (30 in.) moderate service with clipped corners
	▲		▲	▲	760-mm (30 in.) extreme service with clipped corners
				●	910-mm (36 in.) moderate service with clipped corners
				▲	910-mm (36 in.) extreme service with clipped corners
					Canopy Cab Operator's Station / Electrical
●	●				Retractable seat belts, 76 mm (3 in.) (conform to SAE J386)
●	●				Convex interior rearview mirror, 102-mm (4 in.) tall, 203-mm (8 in.) wide (conforms to SAE J985)
●	●				Power port, 12 volts, 10 amps
▲	▲				2nd console-mounted power port, 12 volts, 10 amps (750K and 850K only)
●	●				Lockable dash-mounted storage compartment
▲	▲				Rear storage compartment (750K and 850K only)
●	●				Cup holders (2)
		●			Air conditioner, 24,000 Btu
		●			Tinted glass
		●			Dome light
		●			Heater (roof mount)
		●			Wipers (intermittent plus 2 speeds) and washers – front window and left and right doors (rear window on 750K and 850K)
		▲			Rear wiper and washer (700K only)
●					Air-ride vinyl seat
		●			Air-ride fabric seat
▲					Deluxe heated and leather-bolstered air-ride seat
▲	●				Under-seat heater
	●				AM/FM, weather-band radio, clock, and MP3 player front plug-in
	●				Radio-area storage slot with power port
●					Sealed alternator, 100 amps
	●				Sealed alternator, 130 amps
●	●				Lockable master electrical disconnect switch
●	●				Multi-function/multi-language LCD monitor: Analog display (fuel level, coolant temperature, and engine oil pressure) / Digital display (engine rpm, charge pressure, hours, DPF soot level, and transmission direction/speed range)
●	●				Built-in diagnostics: Diagnostic-code details / Sensor values / Calibrations / Individual circuit tester
●	●				Key-less start with multiple security modes
●	●				Lights, grille mounted (2), rear mounted (2)
▲	▲				Work lights (2), roof mounted
●	●				Engine compartment light (750K and 850K only; optional on 700K)
		▲			External-mounted rear attachment mirror
▲	▲				Quick-service ports
▲	▲				Fast-fuel system (750K and 850K only)
●	●				JDLink™ Ultimate wireless communication system (available in specific countries; see your dealer for details)

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan at test conditions specified per ISO9249. No derating is required up to 3050-m (10,000 ft.) altitude. Also available: winches, fair-leads, log arches, skidding grapples, trash packages, landfill protection packages, cable plows, side booms, field-installed cab for canopy, canopy heater, and fire-suppression systems. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with ROPS, full fuel tanks, and 79-kg (175 lb.) operators; 700K XLT unit with 560-mm (22 in.) track shoes and PAT blade; 700K LGP unit with 760-mm (30 in.) track shoes and PAT blade; 750K XLT unit with rigid drawbar, 560-mm (22 in.) track shoes, and PAT blade; 750K LGP unit with rigid drawbar, 865-mm (34 in.) track shoes, and PAT blade; 750K unit with rigid drawbar, 560-mm (22 in.) track shoes, and OSD blade; 850K WT unit with 760-mm (30 in.) track shoes and OSD blade; 850K XLT unit with 610-mm (24 in.) track shoes and OSD blade; 850K WLT unit with 760-mm (30 in.) track shoes and PAT blade; 850K LGP unit with 910-mm (36 in.) track shoes and OSD or PAT blade; and 850K unit with 610-mm (24 in.) track shoes and OSD blade. Operator station ROPS and FOPS certified.

