

Field GrainBelts
Harvest GrainBelts
Transfer GrainBelts
GrainDeck

GRAINBELTS



Brandt

15 SERIES FIELD GRAINBELTS

Unmatched versatility, economy, and speed.

Available in both Top Drive and S-Drive configurations, these GrainBelts are simply the fastest and most efficient conveyors in their class.

Top Drive Models: 1535TDLP, 1545TDLP

Gentle Handling

Brandt's Field GrainBelts make it easy to move large quantities of grain with the powerful combination of speed, gentleness and versatility. Whether you want to move grain from a truck to an air cart or from a storage system to a transport truck, a Field GrainBelt can handle the job with ease. Engineered to get the job done quickly and carefully, Field GrainBelts protect your seed investment and maintain grain quality, all while moving robust capacities. Brandt's Field GrainBelts ensure you get the job done fast. Durable and easy to transport, these conveyors come in a variety of configurations to meet your grain handling needs.

Powerful & Versatile

STAY ON TRAK

Brandt's EZTRAK tensioning and tracking system keeps your belt aligned and properly tensioned at all times. A patented steel envelope keeps the belt aligned while the heavy duty springs maintain consistent belt tension. The visual tension indicator makes it easy to see when adjustment is needed.

COMPACT VERSATILITY

The unique low profile hopper is only 8 inches high collapsed and extends up to 16 inches. This allows for easy under-bin positioning.

Top Drive

DRIVE OPTIONS

Electric Drive
Hydraulic Drive

ATTACHMENT OPTIONS

Wrap Roller
Bucket Spout
Hopper Cover
Safety Lights

LP+ Models:
1537LP+, 1547LP+, 1552LP+

37/47/52LP+ Field GrainBelt

TECHNICAL SPECIFICATIONS

 **9,000**^{BU}/HR

 **35** HORSEPOWER

35/45LP Field GrainBelt

TECHNICAL SPECIFICATIONS

 **6,500**^{BU}/HR

 **25** HORSEPOWER

35/45TDLP Field GrainBelt

TECHNICAL SPECIFICATIONS

 **5,000**^{BU}/HR

 **7.5** HORSEPOWER



S-Drive Models: 1535LP, 1545LP, 1537LP+, 1547LP+

S-Drive

DRIVE OPTIONS

- Gas Drive
- Electric Drive
- Diesel Drive
- PTO Drive

ATTACHMENT OPTIONS

- Bucket Spout
- Hopper Cover
- Weight Transfer Kit
- Hydraulic Winch
- Safety Lights
- Work Lights
- Electric Clutch
- Remote Clutch
- Soft Start Clutch
- EZMOVE



Top Drive Electric Motor



EZMOVE Joystick Control



Removable Hitch



Gas Motor

20 SERIES FIELD GRAINBELTS

Leave competitors in the dust.
This is the fastest conveyor we've ever built, and unlike competitors, it'll achieve maximum capacity even at truck loading height.

Models: 2045LP, 2055LP

20 Series Field GrainBelt

TECHNICAL SPECIFICATIONS



14,000 BU/HR



35 HORSEPOWER

That Extra Punch

If the 15 Series isn't enough for your farming operation, Brandt's 20 inch big brother is the belt for you. By adding another five inches to the belt width and increasing belt wrap, the 2045LP delivers a whopping 14,000 bu/hr using a 35 horsepower diesel engine. Get even better capacity and efficiency by upgrading to a diesel drive.

Versatile Utility

Brandt's low profile hopper easily fits under center dump grain trucks, hopper bottom bins and center bin unload systems so you can use it anywhere. The 16 inch tall hopper collapses down to 9.5 inches to fit under whatever you need to unload.

DRIVE OPTIONS

Gas Drive
Diesel Drive
Electric Drive

ATTACHMENT OPTIONS

Bucket Spout
Hopper Cover
Weight Transfer Kit
Hydraulic Winch
Safety Lights
Work Lights
Electric Clutch
Remote Clutch
Soft Start Clutch
EZMOVE



EZTRAK Tensioning System



Low Profile Hopper Under Bin

NEW EZMOVE

ALL-WHEEL DRIVE KIT



PRODUCT FEATURES



**HYDRAULIC
POWER STEERING**



**DEEP TREAD
STEERING TIRES**



**JOYSTICK
CONTROL**



EZMOVE Controls



Hydraulic Winch (Standard with EZMOVE)

Brandt's revolutionary upgrade to our EZMOVE system ensures that your Field GrainBelt will now take you anywhere you need to be, under any conditions, at any time of the year, to ensure you get the job done fast.

All-Wheel Drive has Arrived

Now, you can **Lead The Field** with the first all-wheel drive system in the industry. Brandt's EZMOVE Mover System allows the operator to effortlessly move GrainBelts around the yard with dramatically improved all-terrain performance.

Less Effort, More Results

EFFORTLESS HYDRAULIC POWER STEERING

The exclusive joystick controlled power steering delivers improved control with less effort. Deep treaded tires keep traction and stability in all terrain.

EASY TO USE

The mover speed can be precisely adjusted using a simple ball valve control. All Brandt EZMOVE systems come standard hydraulic winch and intake lift cylinder.

AWD AVAILABLE ON

Field GrainBelts:
1537LP+, 1547LP+,
1552LP+,

STANDARD EZMOVE AVAILABLE ON

Field GrainBelts:
1535LP, 1545LP,
1537LP+, 1547LP+,
1552LP+, 2045LP,
2055LP

Harvest GrainBelts:
1580A, 1590A, 15100A

GrainDeck

15 SERIES HARVEST GRAINBELTS

Conveys superior versatility and mobility.

Designed to make things easier, the 15 Series is available with gas drive and EZMOVE that provides complete mobility without the need for a tractor. Convenience, ease, and productivity...delivered.



Models: 1580A, 1590A, 15100A

Brandt Harvest GrainBelts are a fast, worry free grain handling solution that save time and money. Gentle and quiet, Brandt Harvest GrainBelts move all your commodities faster than you ever thought possible.

Long-Lasting Capacity

The 1580A, 1590A and 15100A Harvest GrainBelts use a 15 inch belt to move up to 6,700 bushels per hour, and offer choice of the standard intake for use with transfer belts, the new low profile intake for extra clearance, and the new swing away intake for efficiently unloading trucks at harvest. For more capacity, the 2095 and 20110 gently handle product at up to 12,000 bushels per hour and have more reach for use with larger bins.

HIGH TRACTION S-DRIVE

Brandt GrainBelts are high capacity grain handling machines with innovative S-drive technology that provides 270 degrees of wrap for increased surface contact between the belting and the vulcanized drive roller.

DRIVE OPTIONS

- Gas Drive**
- Electric Drive**
- Side Drive PTO Kit**
- End Drive PTO Kit**

ATTACHMENT OPTIONS

- Bucket Spout**
- Hopper Cover**
- Weight Transfer Kit**
- Hydraulic Winch**
- Safety Lights**
- Work Lights**
- Electric Clutch**
- Remote Clutch**
- Soft Start Clutch**
- EZMOVE**

20 SERIES HARVEST GRAINBELTS

Built-in brawn.

When fast just isn't fast enough, this brute is designed to deliver maximum conveying capacity and features fully enclosed wind guards.



Models: 2095, 20110

15 Series Harvest GrainBelt

TECHNICAL SPECIFICATIONS



6,700 BU/HR



35 HORSEPOWER

20 Series Harvest GrainBelt

TECHNICAL SPECIFICATIONS



12,000 BU/HR



54' MAXIMUM HEIGHT



Harvest GrainBelts Loading Ships

Keep on Trak

SIMPLE ALIGNMENT

Brandt's patented EZTRAK system uses both a spring loaded belt tensioner and a steel envelope to eliminate slippage and ensure total control of any belt movement. This prevents the risk of damage to your GrainBelt.

CONSTANT TENSION

An external tension gauge works with the EZTRAK system in order to ensure and maintain proper belt tension; resulting in longer belt and bearing life. The unique two-way, spring loaded tensioner maintains correct tension under all load conditions reducing the frequency of adjustment.

Capacity Calmed

SYNCHRONOUS BELT DRIVE

Brandt GrainBelts use a synchronous belt drive system that is significantly quieter during operation, longer lasting and requires less maintenance than a chain drive system. The system times the double drive rollers perfectly to rotate at the same speed for consistent wrap and tension on the belt.

DRIVE OPTIONS

Electric Drive
Side Drive PTO
End Drive PTO

ATTACHMENT OPTIONS

Hydraulic Wet Kit
Bucket Spout
Hopper Cover
Stainless Adjustment Bolt

20 SERIES GRAINDECKS

Portable pit = productivity.

The Brandt GrainDeck is a portable grain pit designed to boost your productivity. You simply drive your truck over the GrainDeck and unload, eliminating the need to position a hopper under the truck multiple times.



Models: Single Tube, Double Tube

TECHNICAL SPECIFICATIONS



12,000 ^{BU}/_{HR}



5½" LOW
DECK



9'9" WIDE
HOPPER

Drive Over, Drive Away

The 20 inch belt has a capacity over 12,000 bushels per hour; saving you time and getting your trucks back to the field faster. With convenient single set up positioning, the GrainDeck makes the job easy. Once in place, drivers can easily line up their trucks over the deck for quick and easy grain unloading without ever having to reposition the hopper.

Compact Capacity

LOW DECK HEIGHT

Trucks can easily clear the Brandt GrainDeck's low 5 ¾ inch deck height.

WIDE, COLLAPSIBLE HOPPER

At 38" by 118", the robust GrainDeck minimizes spillage and maximizes efficiency. Equipped with spring assisted collapsible hopper flaps, the GrainDeck works with all truck and trailer types to catch and move your grain quickly and efficiently.

Efficiently Versatile

Brandt has developed a bunker kit which allows you to convert the GrainDeck and the 20 Series Field GrainBelt to move in unison along your grain pile.

EZMOVE

The Brandt GrainDeck EZMOVE allows the operator to move the GrainDeck around the yard with ease. With the simple hydraulic joy stick control, the EZMOVE system is extremely operator friendly while positioning your GrainDeck.

The Ultimate Piling Team

Brandt's exclusive Bunker Kit allows you to hydraulically convert the GrainDeck and 20 Series Field GrainBelt to move in unison at 90 degrees to your grain pile. By simply hitting your hydraulic lever on the tractor and attaching cables you can move the unit alongside the bunker without having to unhook and reposition each piece separately.



Low Profile Collapsible Hopper



EZMOVE



Compact, Durable Deck Ramps



GrainDeck Bunker Kit


GRAINDECK
DRIVE OPTIONS
Electric Drive
Hydraulic Drive

GRAINDECK
ATTACHMENT OPTIONS
EZMOVE
Ramp Extensions
Hydraulic Wet Kit
Hydraulic Control
Bunker Kit

TRANSFER GRAINBELTS

Maximize speed, gentleness and versatility.

Combine your Harvest GrainBelt with a Transfer GrainBelt for an unbeatable combination of speed, gentleness, and versatility.

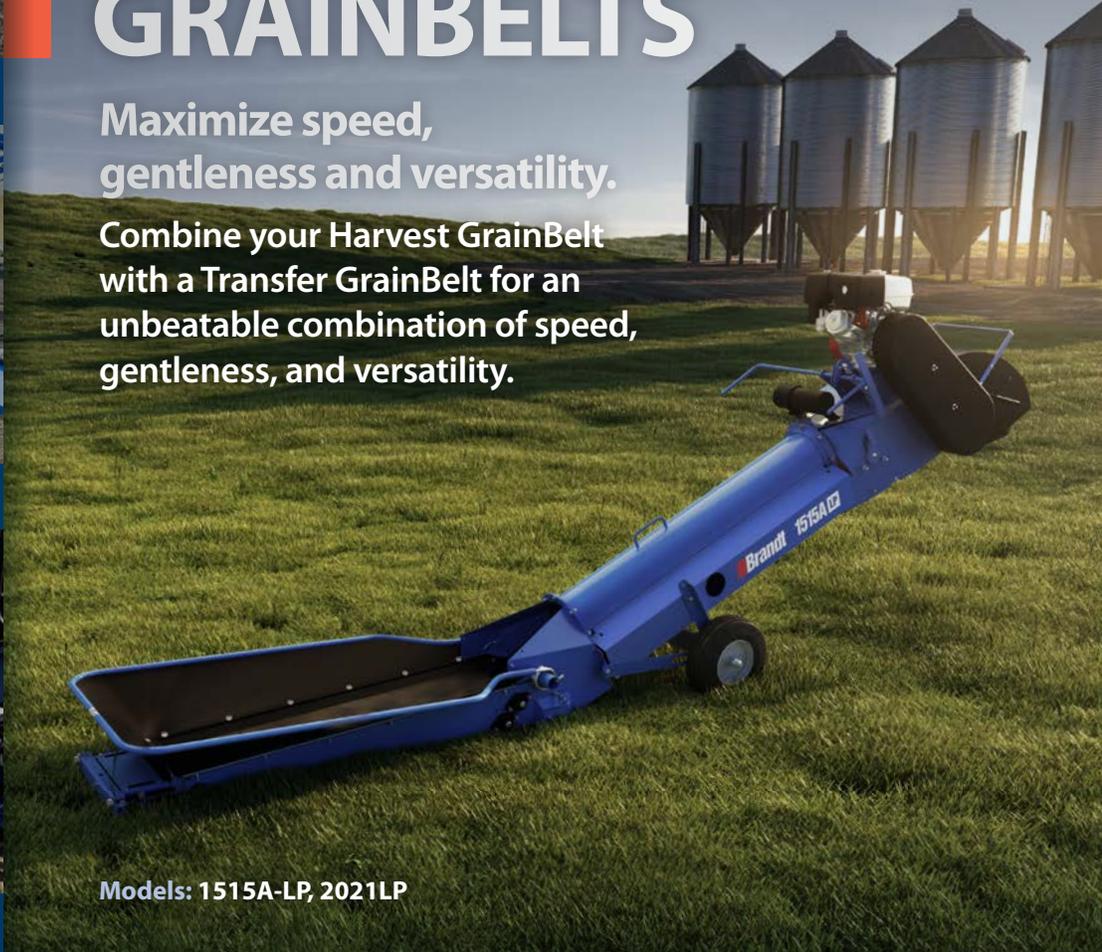

Models: 1515A-LP, 2021LP

The Perfect Team

Small and compact, Brandt Transfer GrainBelts can be used independently or as a swing to feed your Harvest GrainBelt. Team your 15" or 20" Harvest GrainBelt up with a 1515 or a 2021 transfer conveyor for an unbeatable combination of speed, gentleness and versatility while unloading trucks, gravity wagons and belly dump trailers. Multiple drive systems and the optional lift arm kit, create the set up you need for maximum efficiency and less hassle.

DRIVE OPTIONS

- Gas Drive¹**
- Electric Drive**
- Hydraulic Drive**

ATTACHMENT OPTIONS

- Swing Away Kit**
- Lift Arm Kit**
- Hopper Cover**
- Axle Extension Kit¹**
- Jackshaft Side Drive PTO Kit¹**
- Hydraulic Winch²**
- Hydraulic Swing Mover²**

ONLY AVAILABLE FOR

¹ 1515 ² 2021

Field GrainBelts	1535TDLP	1545TDLP	1535LP	1545LP	1537LP+	1547LP+
Performance						
Capacity ¹ (bushels per hour)	5,000	5,000	6,500	6,500	9,000	9,000
Recommended Horsepower - Gas/Diesel ³	n/a	n/a	25	25	25 ⁴ , 35	25 ⁴ , 35
Recommended Horsepower - Electric	5 ⁵ -7.5	7.5 ⁵ -10	10 ⁶ , 15	15 ⁶ , 20	15	20
Hydraulic Requirements	12GPM @ 1800psi ⁷	12GPM @ 1800psi ⁷	n/a	n/a	n/a	n/a
Dimensions						
Belt Width	15"	15"	15"	15"	15"	15"
Conveyor Length	37'	47'	35'	45'	37'	47'
Raised Height	17' 5"	23'	16' 1"	21' 1"	17' 7"	22' 9"
with EZMOVE					17' 10"	22' 8"
Raised Reach	13.4' Elec/15' Hyd	16'9" Elec/18'11" Hyd	13' 4"	18' 2"	16'	20' 10"
with EZMOVE			15' 10"	20' 8"	15' 4"	20' 4"
Lowered Reach	15' Elec/17' 3" Hyd	20'3" Elec/23'1" Hyd	13' 5"	19' 3"	17' 9"	23' 2"
with EZMOVE			15' 11"	21' 6"	16' 7"	22' 4"
Transport Height (hitch at 12")	10' 7"	11' 8"	11' 8"	12' 7"	9' 11"	12' 2"
with EZMOVE			11' 8"	12' 7"	11' 5"	12' 3"
Transport Length	40' 5"	48' 1"	40' 8"	50' 9"	39' 8"	49' 8"
Intake Reach	9'6" Hyd/11'11" Elec	9'1" Hyd / 12' Elec	16' 3"	20' 6"	13'	15' 6"
with EZMOVE	n/a	n/a	11' 10"	14' 4"	12' 2"	15' 4"
Wheel Track Width	94"	94"	94"	94"	94"	94"
Total Weight	1,720 lb	2,030 lb	2,250 lb	2,500 lb	1,945 lb	2,350 lb
Hitch Weight (without EZMOVE)	80-100 lb	80-100 lb	70 lb	70 lb	280 lb	320 lb
Tube Diameter	10"	10"	10"	10"	10"	10"
Tire Size	ST205/75D15	ST205/75D15	ST205/75D15	ST205/75D15	ST205/75D15	ST205/75D15
Features						
Hydraulic Winch	n/a	n/a	Optional	Optional	Optional	Optional
Windguards	Standard	Standard	Standard	Standard	Standard	Standard
Belt Type	Rubber	Rubber	Rubber	Rubber	Rubber	Rubber
Drive System	Top Drive	Top Drive	S-Drive	S-Drive	S-Drive	S-Drive
Hopper						
Hopper Style	Low Profile	Low Profile	Low Profile	Low Profile	Low Profile	Low Profile
Hopper Width and Length	36" X 60"	36" X 60"	36" X 60"	36" X 60"	36" X 70"	36" X 70"
Collapsed Hopper Height	8"	8"	8"	8"	7.5"	7.5"
Extended Hopper Height	16"	16"	16"	16"	14"	14"

Harvest GrainBelts	1515A-LP	1580A	1590A	15100A	2021LP	2095	20110
Performance							
Capacity ¹ (bushels per hour)	7,000	6200-6700	6200-6700	6200-6700	12,000	12,000	12,000
Recommended Horsepower - Gas/Diesel/PTO ²	11	35-55	38-60	40-65		80	100
Recommended Horsepower - Electric	5-7.5	N/A	N/A	N/A	10	40	50
Hydraulic Requirements	11gpm	11-16 gpm @ 2000psi	12-16 gpm @ 2000psi	13-16 gpm @ 2000psi	11 gpm	1500 psi	1900 psi
Dimensions							
Belt Width	15"	15"	15"	15"	20"	20"	20"
Conveyor Length	15'	80'	90'	100'	21'	95'	110'
Raised Height	3'11"	38' 9" - 39' 4"	43' 9" - 44' 5"	48' 9" - 49' 5"	70"	47'2"	54'
Raised Reach	64"	31' 3"	39' 2"	42' 6"	64"	38'	44'6"
Lowered Reach	64"	36 11"	46' 3"	51 2"	64"	44'3"	50'1"
Transport Height (hitch at 12")	4'10"	12' 11"	13' 6"	13' 6"	7'7"	13'3"	12'11"
Transport Length	19'	84' 11"	94' 11"	104' 11"	25'	99'7"	114'3"
Wheel Track Width	29"(std) or 51"(opt)	12' 2"	12' 2"	12' 2"	65"	160"	196"
Total Weight	480 lb	5809 - 6228 lb	6051 - 6489 lb	6434 - 6710 lb	1,000 lb	8,000 lb	9,320 lb
Hitch Weight	n/a	1633 - 2190	1492 - 1862	1616 - 2019	n/a	1,860 lb	1,720 lb
Tube Diameter	10"	10"	10"	10"	14"	14"	14"
Tire Size	8"	225/75R15	225/75R15	225/75R15	6.70 x 15	ST235/85R16	ST235/85R17
Features							
Hydraulic Winch							
Windguards	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Belt Type	Rubber	2-Ply Rubber	2-Ply Rubber	2-Ply Rubber	Rubber	Rubber	Rubber
Drive System	Top-Drive	S-Drive	S-Drive	S-Drive	Top-Drive	S-Drive	S-Drive
Hopper							
Hopper Style	Low Profile	Low Profile	Low Profile	Low Profile	Low Profile	Standard	Standard
Hopper Width and Length	36" x 70"	36" x 70"	36" x 70"	36" x 70"	40" x 79"	40" x 42"	40" x 42"
Collapsed Hopper Height	7.5"	16"	16"	16"	9.5"	17"-22"	17"-22"
Extended Hopper Height	16"	16"	16"	16"	16"	24"-27"	24"-27"

1552LP+	2045LP	2055LP
7,500-9,000	14,000 ²	14,000 ²
35	35	35
25	20	20
n/a	n/a	n/a
15"	20"	20"
52'	47' 11"	55'
24' 8"	21' 3"	25' 5"
23' 6"	17' 3"	22' 10"
26'	19' 7"	24' 6"
13' 5"	11' 7"	12' 8"
56' 3"	50' 9"	60' 5"
15' 6"	24' 2"	15' 2"
14' 7"	16' 0"	15' 2"
94"	94"	130"
2,590 lb	4,950 lb	6,700 lb
300 lb	200 lb	450 lb
10"	14"	14"
ST205/75D15	ST225/75R15	ST225/75R15
Optional	Optional	Optional
Standard	Standard	Standard
Rubber	Rubber	Rubber
S-Drive	S-Drive	S-Drive
Low Profile	Low Profile	Low Profile
36" X 70"	40" X 70 "	40" X 70 "
7.5"	9.5"	9.5"
14"	16"	16"

- 1 Standardized test capacities, actual results vary by crop and moisture conditions.
 2 Capacity is achieved with 35hp diesel engine (Gas engine yields 12,000 bu/hr)
 3 SAE J1940 Gross Engine Horsepower
 4 Using the 25hp engine will result in a 7,500 bu/hr capacity

GrainDecks

	GrainDeck	Double Tube GrainDeck
Performance		
Capacity ¹ (bushels per hour)	12,000	12,000
Recommended Horsepower - Gas/Diesel/PTO ²		
Recommended Horsepower - Electric	10	15
Hydraulic Requirements	15 gpm	15 gpm
Dimensions		
Belt Width	20"	20"
Conveyor Length	27'5"	38'8"
Raised Height	2'10"	5'1"
Raised Reach	n/a	n/a
Lowered Reach	72"	138"
Transport Height (hitch at 12")	87 3/8"	115 9/16"
Transport Length	27'5"	33"
Wheel Track Width	74"	74"
Total Weight	2,470 lb	2,700 lb
Hitch Weight	500 lb	400 lb
Tube Diameter	14"	14"
Tire Size	6.70 x 15	6.70 x 15
Features		
Hydraulic Winch		
Windguards	Standard	Standard
Belt Type	Rubber	Rubber
Drive System	Top-Drive	Top-Drive
Hopper		
Hopper Style	Deck	Deck
Hopper Width and Length	38" x 117"	38" x 117"
Collapsed Hopper Height	5 3/4"	6 3/4"
Extended Hopper Height	9.5"	9.5"

- 5 Using the low horsepower electric motor option will reduce capacity to 4,500 bu/hr
 6 Lower HP engine yields approx. 20% less capacity
 7 Hydraulic Top Drive capacity is rated at 3,200 bu/hr and will vary depending on tractor hydraulic capabilities

Contact us for more information or to
arrange a demonstration of our products

Brandt Agricultural Products Ltd

P.O. Box 317
13th Ave and Pinkie Rd
Regina, Saskatchewan
Canada S4P 3A1

Toll: 1-866-427-2638
Phone: 1-306-525-1314
Email: agriculture@brandt.ca
Website: brandt.ca

Visit brandt.ca for a list of local Brandt equipment dealers.



About Brandt Group of Companies

Brandt manufactures premium grain-handling equipment for progressive farmers focused on solid, proven value. Our legendary dependability, capacity, speed, and overall cost-efficiency have made Brandt the choice for discerning farmers for more than 80 years, across 20 countries worldwide. Brandt Agricultural Products Ltd. is part of the Brandt Group of Companies, with diverse operations that serve the agriculture, construction, forestry, rail, mining, tube & pipe, and positioning technology sectors. Brandt also develops and manages commercial real estate, and operates the world's largest privately held construction & forestry dealer group. For more information about Brandt, visit brandt.ca.