

# 35-TON HYDRAULIC REMOVABLE GOOSENECK TRAILERS

TRAILER  
**C350**



## COVERAGE YOU CAN COUNT ON

### 2 YEAR WARRANTY

1 year standard comprehensive and 1 year extended warranty with 5 year structural at no additional cost. *Ask us for details.*

### FLEXIBLE FINANCING

Custom financing solutions available to best suit your business. *Ask us for details.*

## Less Weight. More Freight.

The all-new C350 Construction Hydraulic Removable Gooseneck Tandem Trailer from Brandt delivers ideal capacity, durability, and flexibility for all your mid-sized construction equipment hauling needs. Its low tare weight, superior deck space, and a durable frame optimize capacity and ensure it lasts for the long haul.

### ① Higher Productivity

The C350 delivers enhanced productivity with its versatility and speed, allowing you to get on the road faster:

- Best-in-class 12" and 18" loaded deck height works with more equipment without requiring over-height permits.
- Maximized deck well space of up to 32'9" while staying under a 53' OAL.
- Grade 100 steel provides a lower tare weight for superior payload capacity.

### ② Increased Uptime

The C350's high-quality construction and rapid connection points ensure maximum uptime:

- Innovative gooseneck connects on uneven ground with a far greater range for faster turnaround.
- Air controls are placed in a sealed box, ensuring longer life of the components and easy operator access.
- Connect and disconnect the neck from one position with clear visibility to shim arm and other parts.

### ③ Lower Cost of Operation

The C350 features long-lasting components and reduced maintenance, resulting in a lower cost of ownership.

- Purpose-built hydraulic cylinders from Brandt include protective sleeves for a longer cylinder life.
- High-performance wiring harnesses and weather-pack connections dramatically improve longevity.
- The robust, industry-leading gooseneck anti-dive lug won't bend or allow damage from misuse.

Powerful Value. **Delivered.**

**Brandt**


# C350 TRAILER SPECIFICATIONS

BASE UNIT KEY SPECIFICATIONS				
	C350 SQUARE TAIL	C350 PAVER	C350 BEAVERTAIL	C350 MINI DECK
<b>RELIABILITY - RATED CAPACITY</b>				
Capacity	70,000 lb Fully Distributed (51,000 lb in 12')			
Overall Length	47'11"	47'11"	47'11"	48'4"—52'11"
Deck Length	29'	25'	25'	29'—33'4"
Deck Width	8'6"			
Loaded Deck Height	18" @ 6" Ground Clearance	18" @ 6" Ground Clearance	18" @ 6" Ground Clearance	12" @ 4" Ground Clearance
Loaded Ground Clearance	Adjustable to 5 settings: 4.5" to 7.5"			2.5" to 5.5"
<b>GOOSENECK</b>				
Tractor Swing Clearance	88"			
Upper Coupler Height	48"—50"			
Shim Arm	• 5 Ground Height Settings • Sight Window • Shim Arm Lever			
Gooseneck Type	• Anti-Dive Lug with Air-fired Pin, Low Profile Tapered Beams • Hydraulic Operated Support Arm • Removable Drop-in King Pin, Protected Air and Electrical Connections • Easy Detach/Attach on Uneven Ground			
Gooseneck Hydraulics	Truck Wet Kit ISO 7241-B 0.75" Quick Connects, 15 gpm, 3000 psi max			
Gooseneck Top Load Securement	Two D-Rings on top of beam			
Options	<input type="radio"/> Gas Engine Power Pack <input type="radio"/> Work Lights <input type="radio"/> Swing-Out Clearance Lights <input type="radio"/> Aluminum Load Ramp Storage <input type="radio"/> Aluminum Fenders			
<b>MAIN DECK</b>				
Beams	Fabricated, 100 ksi Flanges and Webs, Cambered to Suit Full Load			
Deck Type	Flush Deck, 2' Crossmember Spacing			
Decking	2" Apitong or Fir			
Load Securement	D-rings Between Main Rails, D-Rings on Outer Rail, Chain Cut-Outs on Outer Flange			Additional Chain Cut-Outs on Inner Rail
Options	<input type="radio"/> Swing-Out Clearance Lights			N/A
Outrigger	<input type="radio"/> Clip-In Steel Swing-Out Outriggers, 10' Wide, Every 2', HD 5" x 5" Pull-Outs Front			N/A
<b>AXLES</b>				
Inner Suspension Style	Open Bolster With Boom Trough	2" Apitong Deck	Open Bolster With Boom Trough	2" Apitong Deck, with Mini Boom Trough
Suspension Load Securement	D-Rings, Chain Pockets, Chain Slots			
Air Suspension System	• 5-Position Ride Height Selection • Weather Sealed Air Control Box, Including Air Gauge • 2S2M ABS System • Regulated Air Override • Dump Valve • Spring Brake Release Valve • Airbags shut off valve with a rebound limiter/pin up lugs			
Flip Axle Connection Type	N/A			<input type="radio"/> PL10 Single Axle Flip Up Booster
<b>AXLE SPACING</b>				
49"	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	
54"				<input checked="" type="radio"/>
<b>RAMPS</b>				
Front Ramps	Integrated no hang-up ramps with grouser bars	Low loading angle, 9° Flip Ramp	Integrated no hang-up ramps with grouser bars	Integrated no hang-up ramps with grouser bars
Suspension Transition	55°	20°	28°	45°
Rear Ramps	N/A	N/A	Rear loading with spring assisted flips up ramps	N/A


● Included at no extra cost   ○ Option available   \*See Dealer for Details

# C350 TRAILER DIMENSIONS


## C350 Square Tail

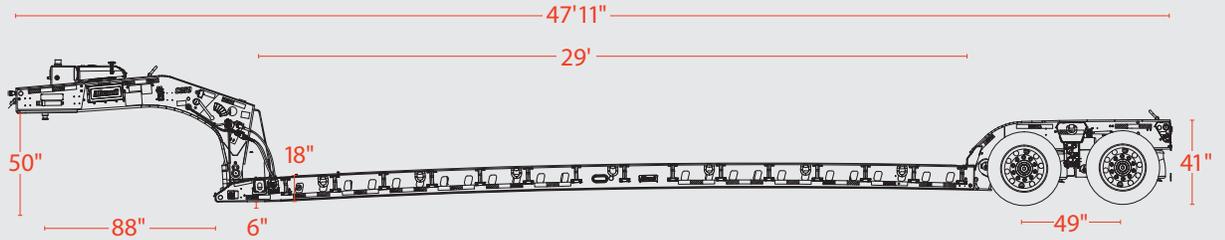


## C350 Paver

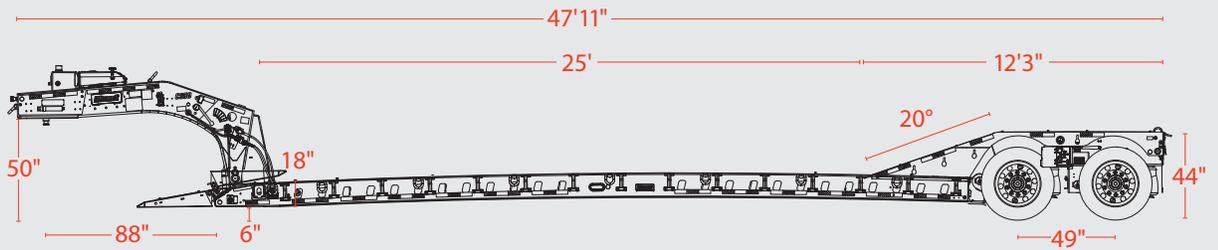

## C350 Beavertail

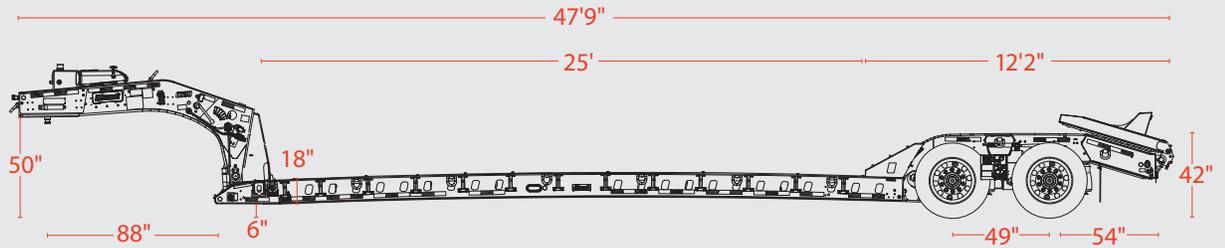

## C350 Mini Deck

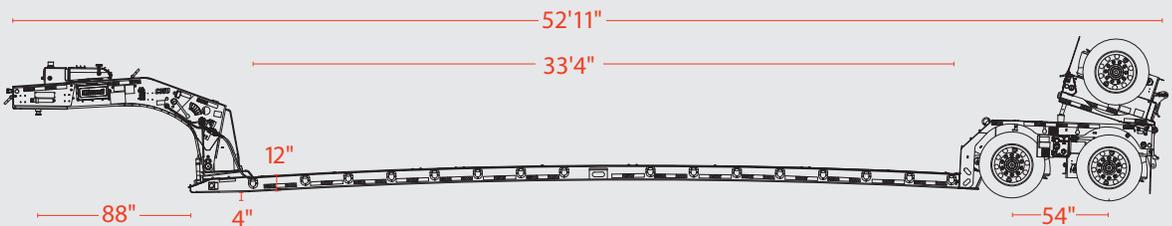

# C350 TRAILER FEATURES



## Smoother Ride

Engineered to handle 100% of the load, the premium-grade 100-steel frame is stiffer yet lightweight, ensuring a ride that won't bounce or flex.

## Industry-leading Deck Well

The industry-leading deck well design maximizes usable deck length to up to 32'9" while ensuring a total length of under 53 feet.

## Superior Brake Performance

The boosted tractor brake signal enhances braking performance with faster response times and uniform braking without drag, while reducing jackknife risk through trailer push prevention.

## Durable Powder-coat Finish

The powder-coat finish enhances durability and resale value. It provides superior rust protection and better coverage compared to spray-applied paint on competing units.

## Sealed Suspension Controls

Suspension controls are mounted inside the driver's side bolster behind a sealed door. This design protects the components from damage and the elements, ensuring a longer lifespan.

## High-quality Decking

High-quality hardwood decking lasts longer than pressure-treated options, and provides a safe working space for operators.

## Auto-Ratchet Shim Arm

The easy-to-set, auto-ratcheting shim arm has five settings in 2-inch increments to maintain optimal ground clearance. The shim arm also drops into place as the trailer is raised, simplifying operation. The shim arm sight hole is located at the back of the gooseneck.

## Electrical Harness

OEM-grade braided loom electrical harness resist abrasion for longer life and feature weatherproof connectors for added reliability.

## Lower Deck Height

C350 models feature an 18" deck height with 6" ground clearance, so you can load larger, wider equipment, reduce permit requirements, and comply with bridge laws. The C350 mini deck delivers a lower 12" deck height and 4" ground clearance for even more specialized loading needs.

For more information:  
Call us at **1-888-227-2638**  
Email us at **sales@brandt.ca**  
Or visit us at **brandt.ca/trailers**

© Brandt Industries Ltd. All rights reserved. The Brandt name and logo are trademarks of Brandt Industries Ltd., used under license. All product information and specifications are subject to change without notification. Printed in Canada. Revised 01/2026-CU