




TECHNICAL INFORMATION | TRACK-MOUNTED CONE CRUSHERS

MOBICONE MCO 11 S



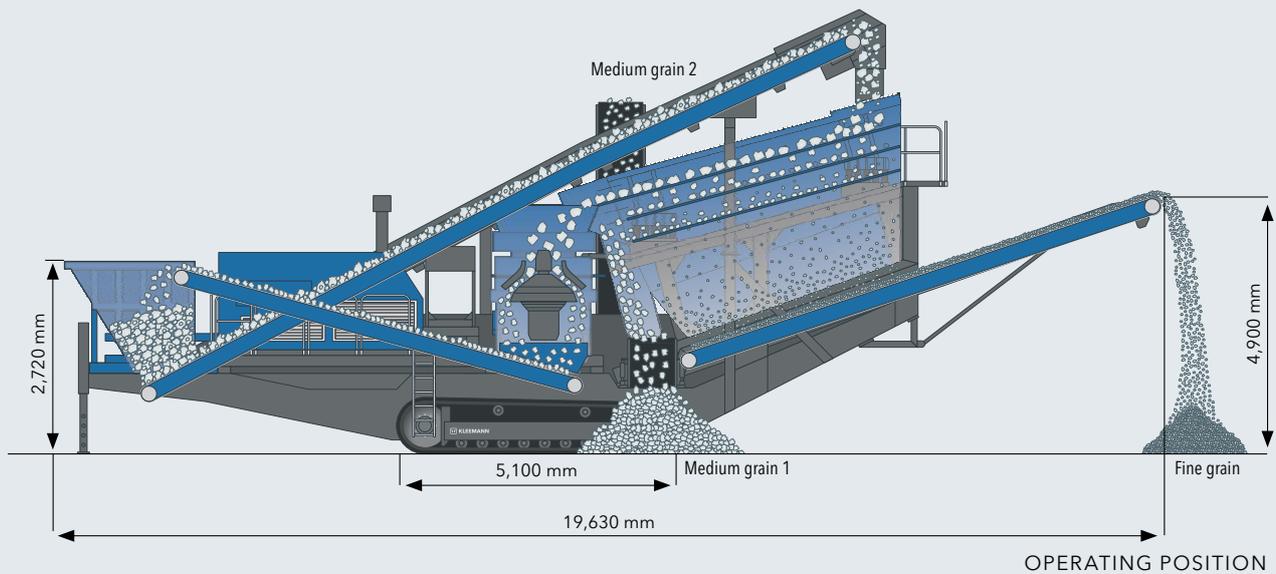

TECHNICAL HIGHLIGHTS

- Closed material loop for production of three defined final grain sizes with triple-deck classifying screen
- Available as secondary and tertiary crusher
- Diesel-electric drive concept
- Linkage option with other KLEEMANN plants (option)

TECHNICAL INFORMATION MCO 11 S

Feeding unit

Feed capacity up to approx. (t/h)	450
Feed size max. (mm)	200
Feed height approx. (mm)	2,720
Feed height with extension approx. (mm)	3,600
Hopper volume (m ³)	3
Hopper volume with extension (m ³)	10
Feed opening width x length (mm)	2,000 x 3,100
Feed opening with extension width x length (mm)	3,100 x 4,000

Vibrating feeder

Width x Length (mm)	900 x 2,700
---------------------	-------------

Belt conveyor for transporting feed material

Width x Length (mm)	1,000 x 15,200
---------------------	----------------

Screening unit

Type	triple-deck vibrating screen
Width x Length (lower deck) (mm)	2,050 x 5,000 (4,800)

Discharge conveyor for screen underpass (fine grain)

Width x Length (mm)	1,200 x 8,800
Discharge height approx. (mm)	4,900

Discharge conveyor for screen overpass - lower deck (medium grain 1)

Width x Length (mm)	650 x 8,000
Discharge height approx. (mm)	3,300

Discharge conveyor for screen overpass - middle deck (medium grain 2)

Width x Length (mm)	650 x 8,000
Discharge height approx. (mm)	3,300

Crusher

Cone crusher type	KX 300
Crusher system size d = (mm)	1,120
Crusher weight approx. (kg)	16,030
Crusher drive type, approx. (kW)	electric, 200
Crushing capacity with final grain size 0-32 mm (feed size 0 - 150 mm) approx. (t/h)	230
Crushing capacity with final grain size 0-45 mm (feed size 0 - 180 mm) approx. (t/h)	290
Crushing capacity with final grain size 0-56 mm (feed size 0 - 200 mm) approx. (t/h)	315

Belt conveyor discharge for crushed material

Width x Length (mm)	800 x 7,800
---------------------	-------------

Power supply unit

Drive concept	diesel-electric
Scania (Tier 3 / Stage IIIA) (kW)	364
Generator (kVA)	540

Transport¹⁾

Transport height approx. (mm)	4,000
Transport length approx. (mm)	19,630
Transport width max. (mm)	3,400
Transport weight approx. (kg)	75,000

¹⁾ plant dismantled for transportation (approx. 6 trailers), dimensions of main unit

Options: Probe control system / Magnetic remover / Metal detector / Spray system