
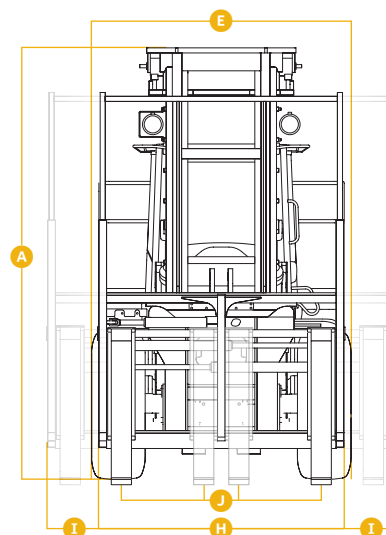


SPECIFICATIONS

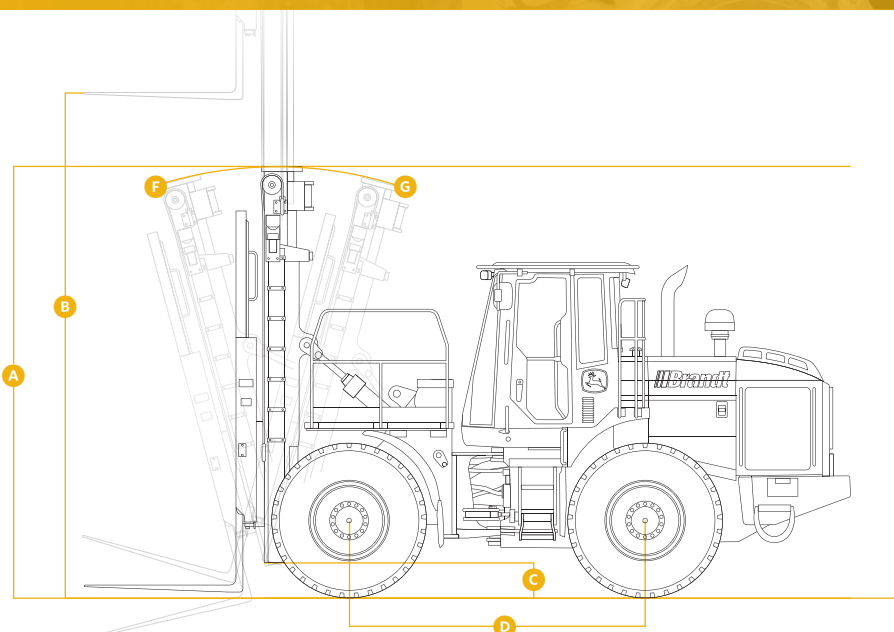

	RTF160	RTF200	RTF240	RTF320
Mast	2-Stage Roller-Style	2-Stage Roller-Style	2-Stage Roller-Style	2-Stage Roller-Style
Capacity @ 24" Load Center	16,000 lb	20,000 lb	24,000 lb	32,000 lb
A Overall Height (Lowered)	147.1"	165.6"	166.9"	154"
B Maximum Lift Height	168"	194"	194"	160"
C Ground Clearance	12.1"	12.7"	13.9"	16.6"
D Wheelbase	9'7"	10'1"	10'8"	11'4"
E Total Width (standard tires)	100.2"	104.6"	113.2"	116.4"
F Tilt Forward	15°	15°	15°	13.5°
G Tilt Rearward	15°	15°	15°	13.5°
Mast Pivot Pins	2.00" diameter	2.25" diameter	2.25" diameter	2.5" diameter
H Carriage Outside Width	96"	96"	96"	105"
Carriage Backrest	Included	Included	Included	Included
I Total Side Shift	12"	18"	18"	18"
Fork Tine Size	2.00" x 10"	2.75" x 8"	2.75" x 8"	2.75" x 10"
Fork Tine Length	48"	60"	60"	60"
Fork Tine Taper	Full Taper	Full Taper	Full Taper	Full Taper
! Optional Fork Tine styles and sizes are available upon request.				
J Fork Positioning (Independent LH/RH)	0" - 92.00"	7.75" - 86.38"	7.75" - 86.38"	6.5" - 96.5"
Net Peak Power	142 hp	186 hp	232 hp	304 hp
Net Peak Torque	504 lb. ft	609 lb. ft	783 lb. ft	1073 lb. ft
Engine Manufacturer	John Deere	John Deere	John Deere	John Deere
Engine Model	PowerTech PVS 6068	PowerTech PVX 6068	PowerTech PSX 6090	PowerTech PSS 6090
Transmission Type	Powershift	Powershift	Powershift	Powershift
Tire Size - Standard	20.5 R25	20.5 R25	23.5 R25	26.5 R25