



BPL100K Pipelayer

3 YR WARRANTY AVAILABLE

1 Year Bumper-to-Bumper Warranty on all components. Extended warranty for 2 or 3 years available at extra cost. *Ask us for details.*

FLEXIBLE FINANCING

Custom financing solutions available to best suit your business. *Ask us for details.*



Go Hard or Go Home.

The Brandt BPL100K is built tough to succeed in the most challenging conditions and is certified for John Deere equipment. Robust, easy-to-operate Brandt pipelayers set a new industry standard for performance, delivering unmatched productivity, safety and operational efficiency.

① Productivity

Brandt's unique BPL100K sideboom design combines a symmetrical boom and low-mount, easy-access winch design to deliver maximum productivity for your operation.

- **Visibility** – optimal winch placement maximizes operator visibility
- **Stability** - symmetrical winch mount locations deliver equal weight distribution and lower center of gravity
- **Reliability** - winch location gives better cable tracking, reducing premature cable wear
- **Capacity** - winches have 30,000 lbs of line pull capacity rated at a hook speed of 60 ft/min

② Safety

Brandt delivers unmatched safety with the SmartLift™ Dynamic Stability Monitoring System. It delivers a continuous stream of real-time terrain and machine data, allowing operators to effectively monitor and manage capacity under all conditions.

- **Cameras/Radar** - packages available with up to three cameras and three radar units
- **Low Rope Calculator** - winches have low rope warnings integrated into the SmartLift™ screen
- **Automated Warnings** – Sigalarm high-voltage overhead line warnings, anti-two-block warnings (supported by SmartLift™)

③ Operational Efficiency

Brandt BPL100K pipelayers deliver unmatched cost-effectiveness and ease-of-operation by combining the versatility of Deere's hydrostatic drive, with fully-proportional hydraulics and unique tear-down, set-up and hook block storage features.


- **Hydrostatic Drive** - dual-path system delivers infinite drive-speed options
- **ECO Mode** - automatically adjusts engine power settings, based on load, for maximum fuel economy
- **Ground Contact** - 9,309 in² total ground contact, minimizing right-of-way impact
- **Hook Block Storage/Counterweight Installation** - facilitates a simple and quick tear down and set up, increasing uptime

Powerful Value. **Delivered.**

Brandt

BPL100K PIPELAYER SPECIFICATIONS

System	Spec	BPL100K	Units
Load Rating	Max Load @ 4' Overhang	106,000	lbs
	Rated Load @ 4' Overhang	89,000	lbs
Operating Weight		70,000	lbs
Counterweight	Total Removable Weight	12,000	lbs
Hook Winch	Drum Diameter	10	in
	Flange Diameter	19	in
	Drum Length	10.78	in
	Wire Rope Diameter	0.75	in
	Hook Winch Rope Length	205	ft
	Load Block Line Parts	4	
	Hook Speed (full drum)	80	ft/min
Boom	Boom Length	20, 24, 28	ft
Boom Winch	Drum Diameter	10	in
	Flange Diameter	20	in
	Drum Length	9.38	in
	Wire Rope Diameter	0.75	in
	Boom Winch Rope Length	205	ft
Hydraulics	Aux Pump Pressure	4000	psi
	Aux Pump Output	76	gpm
Undercarriage	Contact Area	9,360	sq. in
	Ground Pressure	7.5	psi
	Chain	Sealed & Lubricated	
	# of Rollers	8	
	# of Shoes, per side	45	
Dimensions	A Operating Length	189	in
	B Length of Track	129	in
	C Height of Cab	130	in
	D Height of 24' Boom	316	in
	E Track Shoe Width	36	in
	F Track Gauge	94	in
	G Width w/ CWT Retracted	150	in
	H Width w/ CWT Extended	220	in

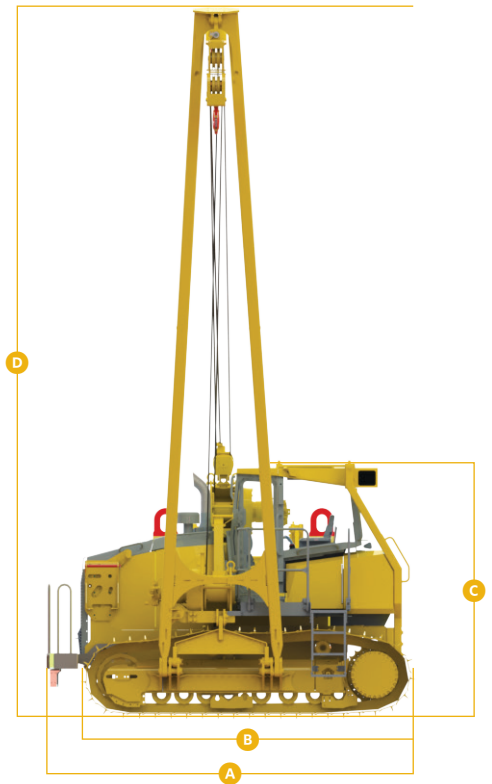

© Brandt Industries Ltd. All rights reserved. Brandt and Brandt logo are trademarks of Brandt Industries Ltd, used under license. All product information and specifications are subject to change without notification. Printed in Canada. Revised 01/2019

For more information:
 Call us at **1-877-533-3133**
 Email us at **beslsales@brandt.ca**
 Or visit us at **www.brandt.ca**

Brandt Equipment Solutions
 PO Box 1876, 302 Mill Street,
 Regina, SK, Canada
 S4P 3E1

